




# RWEYQ10-30MY1

Water Cooled VRV®

- Wide condensing unit range: 10, 20 & 30HP via 1 single refrigerant circuit
- High COP values: 5.21 nominal value
- Up to 32 indoor units connectable to a 30HP condensing unit
- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact design
- Operation range (inlet water temperature): 10-45°C
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Flexible piping length




RWEYQ10MY1

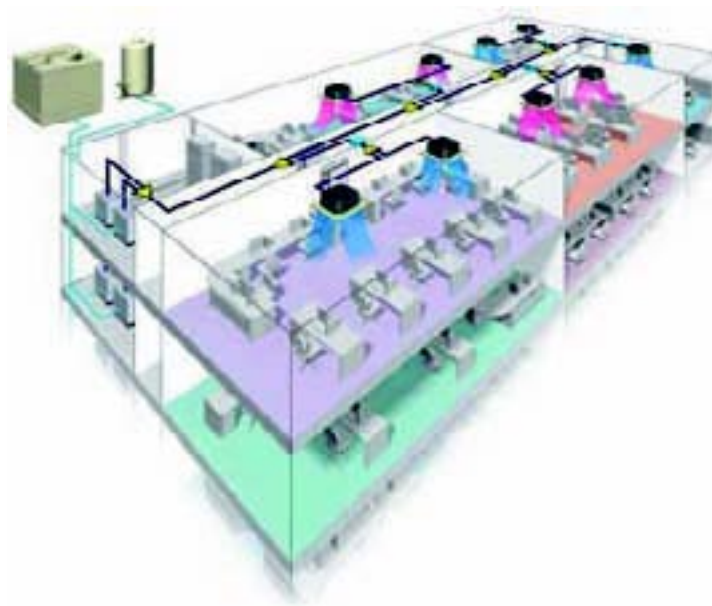

## HEAT RECOVERY

RWEYQ-MY1				RWEYQ10MY1	RWEYQ20MY1	RWEYQ30MY1
Capacity range		HP	10	20	30	
Capacity	Cooling	kw	26.70	53.40	80.10	
	Heating	kw	31.50	63.00	94.50	
Power input (Nominal)	Cooling	kw	6.03	12.10	18.10	
	Heating	kw	6.05	12.10	18.20	
Dimensions	(Height x Width x Depth)		1,000x780x550			
Weight			150	300	450	
Sound Level	Sound Pressure	Cooling	51.0	54.0	56.0	
Refrigerant		R-410A				
Power Supply		3~/380-415V/50Hz				
Max n° of indoor units to be connected		16		20	32	
Piping connections	Liquid (OD)/Gas	mm	9.5 / 22.2	15.9 / 28.6	19.1 / 34.9	

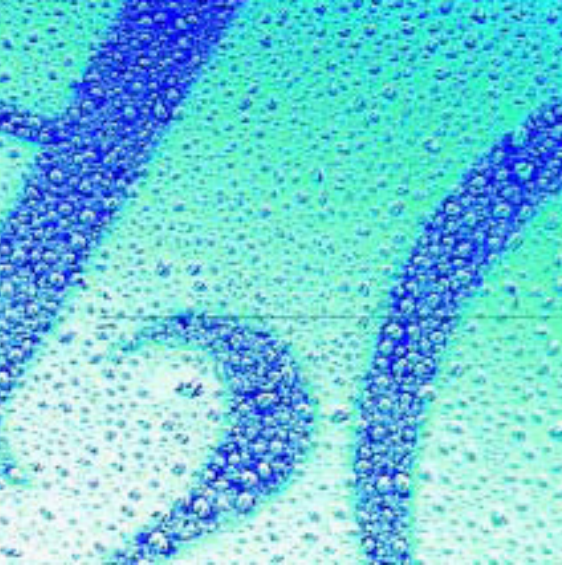


# RWEYQ10-30MY1

## Water Cooled VRV®

- Wide condensing unit range: 10, 20 & 30HP via 1 single refrigerant circuit
- High COP values: 5.21 nominal value
- Up to 32 indoor units connectable to a 30HP condensing unit
- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact design
- Operation range (inlet water temperature): 10-45°C
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Flexible piping length



RWEYQ10MY1

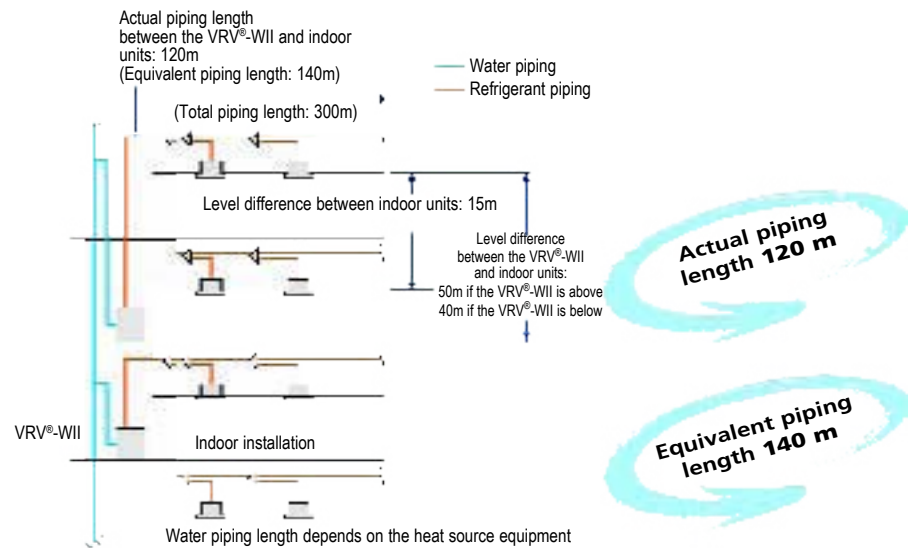

### HEAT PUMP

RWEYQ-MY1				RWEYQ10MY1	RWEYQ20MY1	RWEYQ30MY1
Capacity range		HP	10	20	30	
Capacity	Cooling	kw	26.70	53.40	80.10	
	Heating	kw	31.50	63.00	94.50	
Power input (nominal)	Cooling	kw	6.03	12.10	18.10	
	Heating	kw	6.05	12.10	18.20	
Dimensions	(Height x Width x Depth)	mm	1,000x780x550			
Weight		kg	150	300	450	
Sound Level	Sound Pressure	Cooling	dB(A)	51.0	54.0	56.0
Refrigerant			R-410A			
Power Supply			3~/380-415V/50Hz			
Max n° of indoor units to be connected			16	20	32	
Piping connections	Liquid (OD)	mm	9.52	15.9	19.1	